

Flagging Ribbon

STANDARD COLORS

INTERTAPE POLYMER GROUP®

TECHNICAL DATA SHEET

DESCRIPTION

Taffeta finish, flexible PVC (vinyl) monomeric film. All-weather, UV, water and tear resistant. Bright standard colors for high visibility. Contains no lead or toxic chemicals.

PRODUCT APPLICATION

For high visibility for directional/safety. Surveying: mark and identify boundaries and property lines.

NOMINAL VALUES

The following data are nominal values based on PSTC, ASTM and other standard tests. The data should not be considered as specifications.


| | |
|----------------------------------|----------------------------------|
| Backing | PVC |
| Tensile Strength (lbs/in) | 9 (39 N/25mm) |
| Elongation (% at break) | 280 |
| Total Thickness (mil) | 2.5 (0.0635mm) |
| Colors | Red, Orange, Yellow, Blue, White |



100 Paramount Drive, Suite 300 | Sarasota, FL 34232 | USA
Customer Service: 800.IPG.8273 | 800.474.8273
Tape Technical Service: 877.447.4832
www.itape.com | info@itape.com

While we believe them to be reliable, the statements and information herein are only for general guidance and are not warrants or guarantees for accuracy and completeness. The user must, by test or otherwise, determine suitability for this purpose. There is no warranty of fitness for a particular purpose. Our standard term and conditions of sale apply exclusively to all orders, and all liability for damages of any kind, including consequential, exceeding purchase price is excluded. No one is authorized by us to make oral warranties. We reserve the right to make changes without notice or obligation in our products and publications.

EFFECTIVE: 6/13

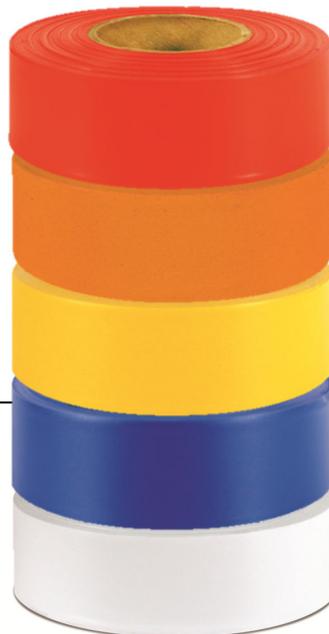

Flagging Ribbon

FLUORESCENT COLORS

INTERTAPE POLYMER GROUP®

TECHNICAL DATA SHEET

DESCRIPTION

Flexible PVC (vinyl) monomeric film. 'All weather', UV, water and tear resistant. Fluorescent colors for high visibility. Contains no lead or toxic chemicals.

PRODUCT APPLICATION

For high visibility for directional/safety. Surveying: mark and identify boundaries and property lines.

NOMINAL VALUES

The following data are nominal values based on PSTC, ASTM and other standard tests. The data should not be considered as specifications.

| | |
|--|--|
| Backing | PVC |
| Tensile Strength (lbs/in) | 11 (48 N/25mm) |
| Elongation (% at break) | 280 |
| Total Thickness (mil) | 4.0 (0.102mm) |
| Night Visibility (w/ beam of light) | 50 yards (45.7m) |
| Colors | Pink Glow, Red Glow, Orange Glow, Yellow Glow, Lime Green Glow |



100 Paramount Drive, Suite 300 | Sarasota, FL 34232 | USA
Customer Service: 800.IPG.8273 | 800.474.8273
Tape Technical Service: 877.447.4832
www.itape.com | info@itape.com



While we believe them to be reliable, the statements and information herein are only for general guidance and are not warranties or guarantees for accuracy and completeness. The user must, by test or otherwise, determine suitability for this purpose. There is no warranty of fitness for a particular purpose. Our standard term and conditions of sale apply exclusively to all orders, and all liability for damages of any kind, including consequential, exceeding purchase price is excluded. No one is authorized by us to make oral warranties. We reserve the right to make changes without notice or obligation in our products and publications.

EFFECTIVE: 6/13