

# ALF200L

## 2.0 MIL PREMIUM GRADE ALUMINUM FOIL TAPE WITH LINER

IPG®

## TECHNICAL DATA SHEET

### DESCRIPTION

2.0 mil dead soft aluminum foil with aggressive, long-lasting pressure-sensitive acrylic adhesive. Engineered and designed for general purpose seaming, patching and sealing to enhance appearance and maintain vapor barrier integrity. Provides long-lasting adhesion to clean, dry surfaces. Flame retardant and high shear adhesion. UV and mold resistant. Excellent reflective properties (i.e. heat, light). Superior bonding when exposed to either sub-zero or elevated temperatures. Release coated kraft liner.

### PRODUCT APPLICATIONS

HVAC (Heating, Ventilation and Air Conditioning) duct wrap. For use in Industrial, Appliance, Marine and Aerospace industries. Can be used as protective mask during chemical stripping of metals and other surfaces.

### GOVERNMENT COMPLIANCE

ASTM E-84 / UL-723



100 Paramount Drive, Suite 300 | Sarasota, FL 34232 | USA

Customer Service: 800.IPG.8273 | 800.474.8273


Tape Technical Service: 877.447.4832

www.itape.com | info@itape.com

### NOMINAL VALUES

The following data are nominal values based on PSTC, ASTM and other standard test. The data should not be considered as specifications.

<b>Backing</b> ASTM C-1136	2 mil (50μ) Aluminum Foil
<b>Adhesive</b>	Acrylic
<b>Tensile Strength</b> (lbs/in width) ASTM D-3759	29 (127 N/25mm)
<b>Elongation</b> (% at break) ASTM D-3759	6
<b>Adhesion to Steel</b> (oz/in) ASTM D-3330	60 (16.4 N/25 mm)
<b>Total Thickness w/o liner</b> (mil) ASTM D-3652	3.9 (0.099 mm)
<b>Flame Spread</b> ASTM E-84 / UL-723	0
<b>Smoke Developed</b> ASTM E-84 / UL-723	0
<b>W.V.T.R</b> (gm/in <sup>2</sup> @ 24 hours)	0.07
<b>Operating Temperature Range</b>	-30°F ~ +350°F (-35°C ~ 176°C)

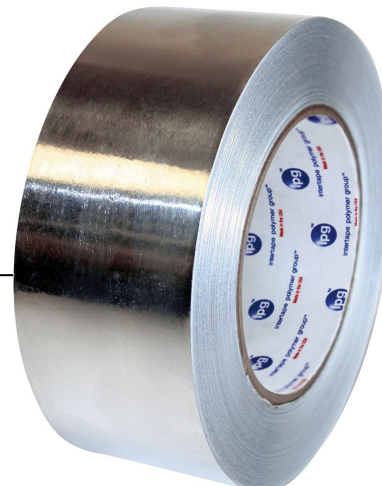

While we believe them to be reliable, the statements and information herein are only for general guidance and are not warrants or guarantees for accuracy and completeness. The user must, by test or otherwise, determine suitability for this purpose. There is no warranty of fitness for a particular purpose. Our standard term and conditions of sale apply exclusively to all orders, and all liability for damages of any kind, including consequential, exceeding purchase price is excluded. No one is authorized by us to make oral warranties. We reserve the right to make changes without notice or obligation in our products and publications.

EFFECTIVE: 11/13