


i tape with **ipg**

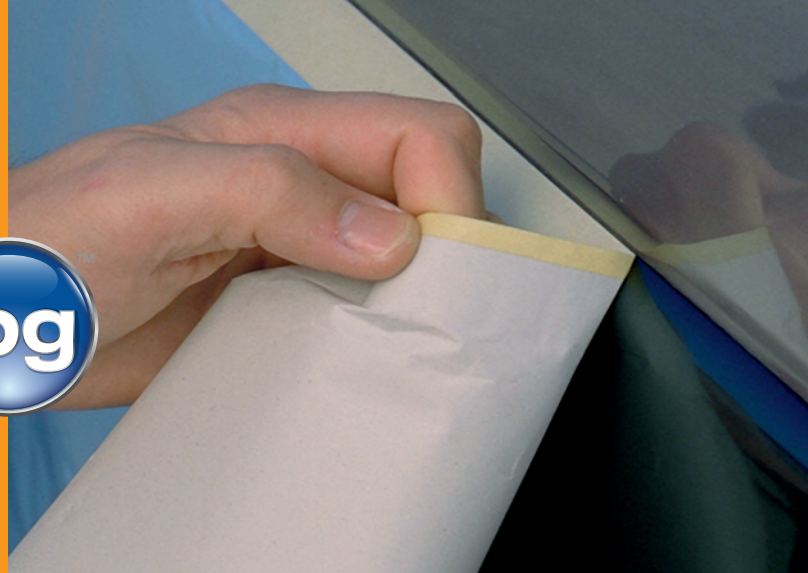

MP

MEDIUM GRADE AUTOMOTIVE REFINISHING TAPE

NEW!



INTRODUCING OUR NEW MP MEDIUM PERFORMANCE MASKING TAPE!

Capable of withstanding oven temperatures up to 250°F (120°C) for one hour, our new MP is also UV resistant for up to 3 days with clean removal. Moisture and stain resistant, its specially designed adhesive sticks firmly and securely to most surfaces and removes cleanly.

Perfect for body shop spray paint applications, it can also be used on boats, wooden window manufacturing, some PCB manufacturing and any critical masking application requiring higher temperature resistance versus most general purpose masking tapes.

For the best finish, get the best start with American® brand MP!

- Superior wet sandability
- Robust backing gives higher tensile strength and better cornering
- 3-day UV resistance
- A new release coat chemistry that provides for better shingling
- No paint flaking upon demask

FEATURES & BENEFITS

ORDERING INFORMATION AND NOMINAL VALUES

| PRODUCT | BACKING | ADHESIVE | TOTAL THICKNESS (mils) | TENSILE STRENGTH (lb/in of width) | ADHESION TO STEEL (oz/in of width) | ELONGATION (% at break) | TEMPERATURE RESISTANCE | COLOR |
|-----------------|-------------|----------------|------------------------|-----------------------------------|------------------------------------|-------------------------|--------------------------|---------|
| | Crepe paper | Natural rubber | 6.1 | 25 | 33 | 8 | 250°F (120°C) for 1 hour | Natural |
| RESOURCE NUMBER | | SIZE | | ROLLS PER CASE | | | | |
| MP1855 | | 18mm x 54.8m | | 48 rolls | | | | |
| MP2455 | | 24mm x 54.8m | | 36 rolls | | | | |
| MP3655 | | 36mm x 54.8m | | 24 rolls | | | | |
| MP4855 | | 48mm x 54.8m | | 24 rolls | | | | |

TAPES & FILMS • PACKAGING PRODUCTS & SYSTEMS • BUILDING MATERIALS • ENGINEERED COATED PRODUCTS

i tape with **ipg**

800-IPG-8273 / 800-474-8273
www.itape.com | E-mail: info@itape.com

©2013 Intertape Polymer Group® • MP SS • N091913 • Printed in the U.S.A.

